# ARC

## BROCHURE
## &
## SPECIFICATIONS



**Lumithree**

**"Attitude is everything**
It sets a tone, creates a mood
and evokes the right impression"

Newly re-imagined ARC LED Fixture.

Featuring a sleek design, the ARC is now available in five standard diameters—12", 18", 24", 32", 36"—or fully customizable dimensions to fit your vision.

Choose from a variety of heights, ranging from a subtle 2" profile to the original 5", giving you unparalleled flexibility to tailor the fixture to your space.

Now offered in vibrant, modern colors and rich wood finish, the ARC adds a striking aesthetic touch while delivering premium LED illumination. Whether as a statement piece or a harmonious addition to your design, the ARC combines versatile form, luxurious finishes, and cutting-edge technology.

# LUMITHREE


# ARC LED
Product Specifications

## ORDERING CODE

ARC – ____ – ____ – ____ – ____ – ____ – ____ – ____ –

| 1 - Product ID | 2 - Diameter | 3 - Height | 4 - Voltage | 5 - CCT | 6 - Mounting | 7 - Finish |
|---|---|---|---|---|---|---|
| **ARC -** Arc LED | **12 -** 12in Dia<br>**16 -** 16in Dia<br>**24 -** 24in Dia<br>**32 -** 32in Dia<br>**36 -** 36in Dia<br>**C -** Custom | **2 -** 2in H<br>**3 -** 3in H<br>**4 -** 4in H<br>**5 -** 5in H<br>**C -** Custom | **120 -** 120V<br>**277 -** 277V | **30 -** 3000K<br>**35 -** 3500K<br>**40 -** 4000K<br>**50 -** 5000K | **AC -** Aircraft Cable (36" std)<br>**CSS -** Center Steel Steem (36" std)<br>**SUR -** Surface Mounted | **WHT -** White<br>**BLK -** Black<br>**SG -** Space Grey<br>**RD -** Red<br>**BLU -** Blue<br>**WD -** Wood<br>**C -** Custom |


| 8 - Options |
|---|
| **D -** 0-10V Dimmable |
| **UP -** Indirect Light |

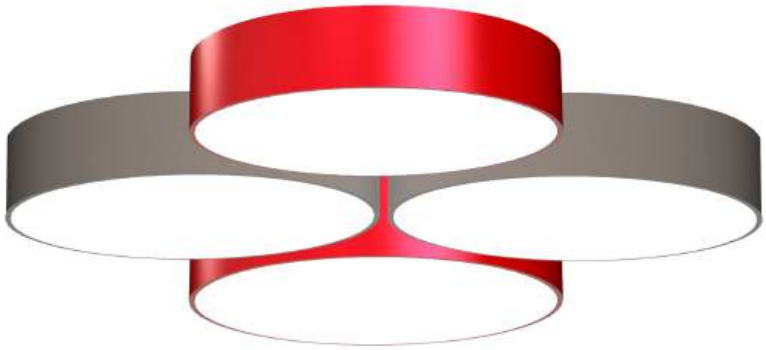


## LIGHTING SPECIFICATIONS

| Dimensions | Wattage | Direct Lumen Output |
|---|---|---|
| **12''** - 11.80'' Diameter | 18 Watt | 1710 Total Lumen Output |
| **16''** - 15.75'' Diameter | 24 Watt | 2280 Total Lumen Output |
| **24''** - 23.62'' Diameter | 48 Watt | 4560 Total Lumen Output |
| **32''** - 31.50'' Diameter | 72 Watt | 6840 Total Lumen Output |
| **36''** - 35.50'' Diameter | 85 Watt | 8075 Total Lumen Output |

**Nominal Efficacy -** 95lm/w
**CRI -** >90

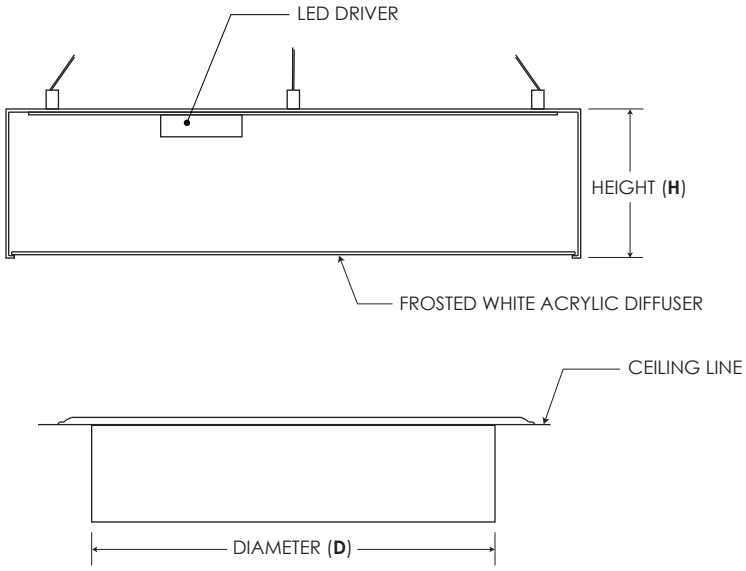

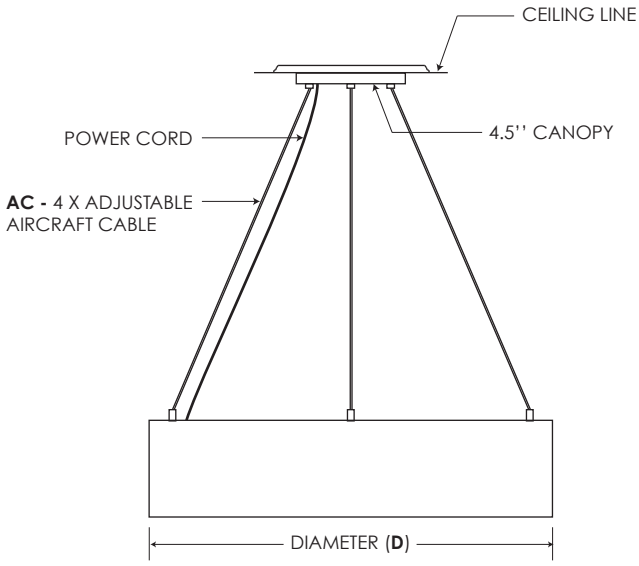
* Not to Scale.


APPROVED BY: _____ SIGNATURE: _____ DATE: _____



**LUMITHREE** | WWW.LUMITHREE.COM | 1.800.455.5316 | 514.334.2045 | 514.334.1355
Lumithree Inc. reserves the right to change or modify product specifications without notice.

c UL us LISTED



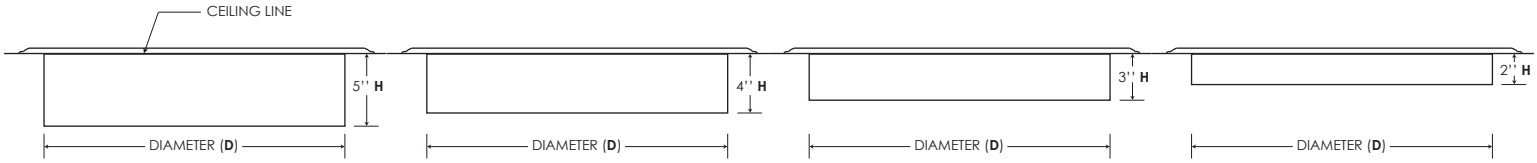


## Construction

- Heavy duty steel frame.
- Frame height can be customized.
- Available in white, black, space grey, red, blue.
- **NEW** available now in wood finish.

## LED Driver

- Equiped with a standard LED driver
- Class II UL certified driver
- Drivers are available in 120V and 277V
- 0-10V Dimmable driver available
- FCC Certified

## Light Engine

- Available in 3000K, 3500K, 4000K, 5000K
- Nomial Efficacy 95lm/w
- CRI - >90

## Compliance

- UL Approved
- All components are UL or ETL approved

## Environment

- Suited for damp location
- Operating temperature range -13°f to 122°f

## Warranty

- Three year limited warranty.

## Mounting

- Suspended with aircraft cables
- Suspended with steel stem
- Surface mounted



**LUMITHREE** | WWW.LUMITHREE.COM | 1.800.455.5316 | 514.334.2045 | 514.334.1355

Lumithree Inc. reserves the right to change or modify product specifications without notice.

c UL us LISTED