Lumithree

LM-1133 Lighted Mirror

Product Specifications


ORDERING CODE

LM-1133-LED – ____ – ____ – ____ – ____ – ____ – ____

1 - Product ID	2 - Dimensions	3 - Voltage	4 - CCT	5 - Driver	6 - Orientation	7 - Installation
LM-1133-LED	**22 -** 22in x 32in **24 -** 24in x 36in **36 -** 36in x 48in **48 -** 48in x 60in **C -** Custom	**120 -** 120V **277 -** 277V **UNV -** Universal	**27 -** 2700K **30 -** 3000K **35 -** 3500K **40 -** 4000K **60 -** 6000K	**10DM -** 0-10V Dim. 10% **1DM -** 0-10V Dim. 1% **TRDM -** Triac Dimming **DLDM -** Dali Dimming **ST -** Standard Non-Dim.	**HR -** Horizontal **VT -** Vertical HR VT	**SM -** Surface

8 - Mounting	9 - Options			
CM - Cleats Mounting[1] [1] Frame white powder coated **KM -** Keyhole Mounting[2] [2] Frame satin aluminum	**DF -** Defogger **TS -** Touch sensor **MS -** Motion sensor **BT -** Bluetooth audio[3]	**M3 -** Magnifying mirror x3 **M5 -** Magnifying mirror x5 **LD -** LED Digital clock **USB -** USB ports[3]	**TNL -** Top night light **BNL -** Bottom night light **PO -** Power outlet[3] **PP -** Power plug[4]	**ADA -** ADA Tilted Mirror [3] Mirror depth to be 3in D [4] Standard is hardwired

CM [1]




KM [2]



LIGHTING SPECIFICATIONS

Dimensions	Direct Wattage & Lumen Output	CRI
22in W x 32in H x 2in D	32 Watt - 3168 Total Lumen Output	90 + CRI
24in W x 36in H x 2in D	36 Watt - 3595 Total Lumen Output	90 + CRI
36in W x 48in H x 2in D	53 Watt - 5302 Total Lumen Output	90 + CRI
48in W x 60in H x 2in D	70 Watt - 7009 Total Lumen Output	90 + CRI

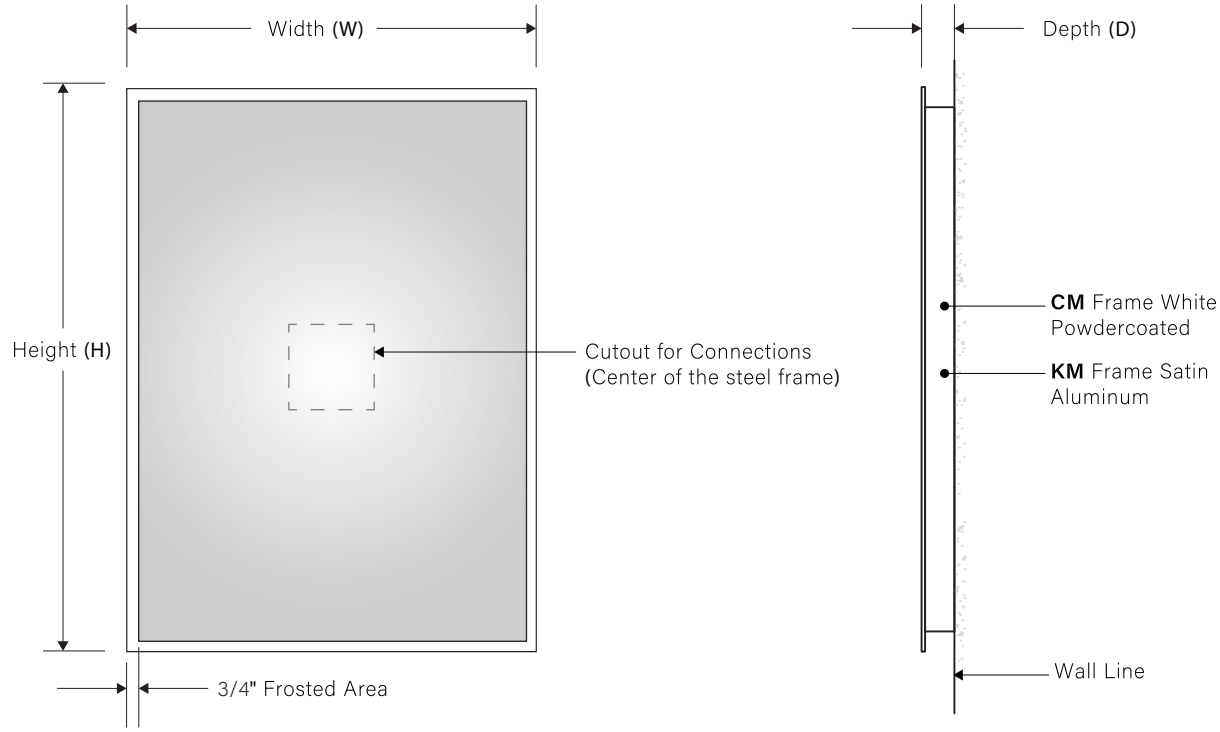

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____

LUMITHREE | WWW.LUMITHREE.COM | 1.800.455.5316 | 514.334.2045 | f. 514.334.1355

Lumithree Inc. reserves the right to change or modify product specifications without notice.

ADA COMPLIANT

c UL us LISTED