


ORDERING CODE

LM-1127-LED - - - - -


1 - Product ID	2 - Dimensions	3 - Voltage	4 - CCT	5 - Driver	6 - Orientation	7 - Installation
LM-1127-LED	22 - 22in x 32in	120 - 120V	27 - 2700K	10DM - 0-10V Dim, 10%	HR - Horizontal	SM - Surface
	24 - 24in x 36in	277 - 277V	30 - 3000K	1DM - 0-10V Dim, 1%	VT - Vertical	
	36 - 36in x 48in	UNV - Universal	35 - 3500K	TRDM - Triac Dimming		
	48 - 48in x 60in		40 - 4000K	DLDM - Dali Dimming	HR	VT
	C - Custom		60 - 6000K	ST - Standard Non-Dim.		

8 - Mounting	9 - Options
CM - Cleats Mounting ¹ ¹ Frame white powder coated KM - Keyhole Mounting ² ² Frame satin aluminum	DF - Defogger TS - Touch sensor MS - Motion sensor BT - Bluetooth audio ³ M3 - Magnifying mirror x3 M5 - Magnifying mirror x5 LD - LED Digital clock USB - USB ports ³ TNL - Top night light BNL - Bottom night light PO - Power outlet ³ PP - Power plug ⁴ ADA - ADA Tilted Mirror ³ Mirror depth to be 3in D ⁴ Standard is hardwired



LIGHTING SPECIFICATIONS

Dimensions	Direct Wattage & Lumen Output	CRI
22in W x 32in H x 2in D	32 Watt - 3168 Total Lumen Output	90 + CRI
24in W x 36in H x 2in D	36 Watt - 3595 Total Lumen Output	90 + CRI
36in W x 48in H x 2in D	53 Watt - 5302 Total Lumen Output	90 + CRI
48in W x 60in H x 2in D	70 Watt - 7009 Total Lumen Output	90 + CRI

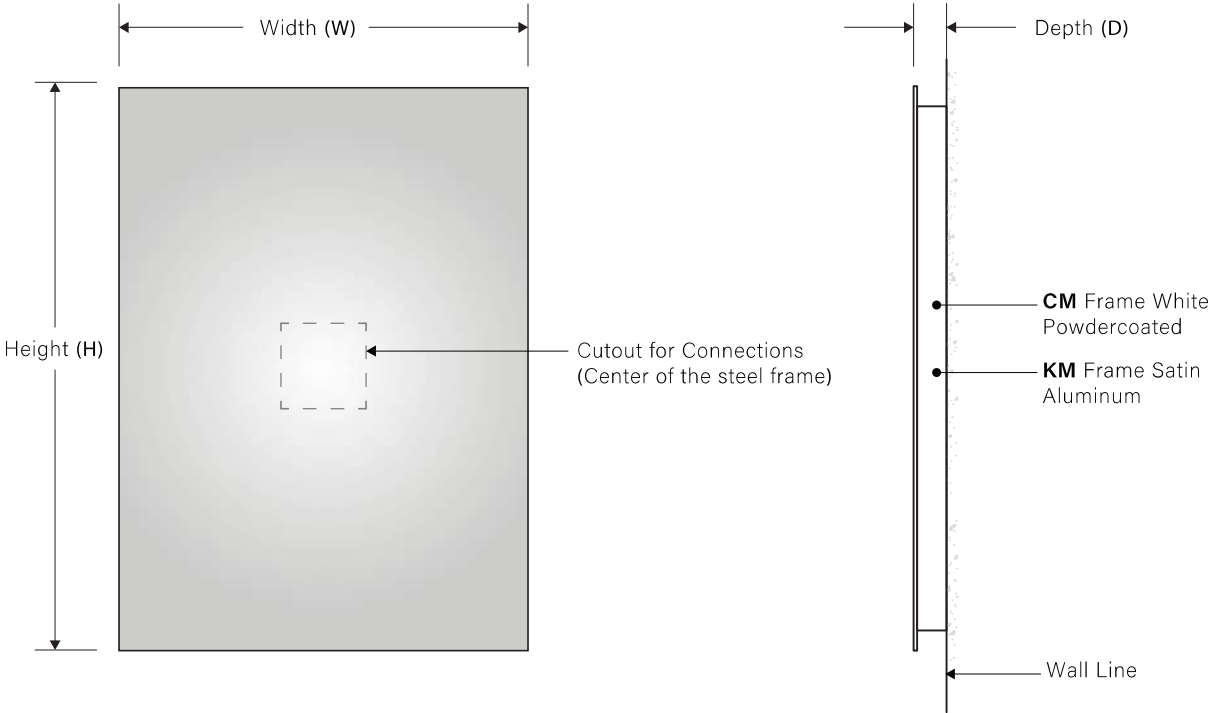

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____

SIGNATURE: _____

DATE: _____

