

HALO AIR

BROCHURE & SPECIFICATIONS



Lumithree

“Light finds its shape”
The Halo Collection, Lumithree

Introducing Halo Air, a suspended square-orbit LED fixture engineered for architectural spaces that call for clean, 360° illumination.

Featuring a sleek square profile available in ten standard sizes from 2' up to 16', Halo Air pairs a PMMA diffuser with a steel frame for a durable, minimalist silhouette that suspends cleanly from a central canopy.

Delivering up to 105 lm/W and a CRI greater than 90 CRI, Halo Air is offered in 3000K, 3500K and 4000K color temperatures with 0-10V dimming option — combining architectural presence with everyday performance.

ORDERING CODE


HA-LED						
1 - Product ID	2 - Diameter	3 - Voltage	4 - CCT	5 - Mounting	6 - Finish	7 - Options
HA - Halo Air LED	2 - 2ft Dia 3 - 3ft Dia 4 - 4ft Dia 5 - 5ft Dia 6 - 6ft Dia 8 - 8ft Dia 10 - 10ft Dia 12 - 12ft Dia 14 - 14ft Dia 16 - 16ft Dia	120 - 120V 277 - 277V UNV - Universal	30 - 3000K 35 - 3500K 40 - 4000K	AC - Aircraft Cable (60" std) SUR - Surface Mounted	WHT - White BLK - Black SG - Space Grey C - Custom paint available	D - 0-10V Dimmable

LIGHTING SPECIFICATIONS

Dimensions	Wattage	Lumen Output
2ft - D23.6in x 4.0in H (D600mm x 100mm H)	40W	4,200 lm
3ft - D35.4in x 4.0in H (D900mm x 100mm H)	50W	5,250 lm
4ft - D47.2in x 4.0in H (D1200mm x 100mm H)	80W	8,400 lm
5ft - D59.0in x 4.0in H (D1500mm x 100mm H)	100W	10,500 lm
6ft - D70.8in x 4.0in H (D1800mm x 100mm H)	120W	12,600 lm
8ft - D94.5in x 4.0in H (D2400mm x 100mm H)	160W	16,800 lm
10ft - D118.1in x 4.0in H (D3000mm x 100mm H)	200W	21,000 lm
12ft - D141.7in x 4.0in H (D3600mm x 100mm H)	240W	25,200 lm
14ft - D165.4in x 4.0in H (D4200mm x 100mm H)	300W	31,500 lm
16ft - D189.0in x 4.0in H (D4800mm x 100mm H)	400W	42,000 lm




Nominal Efficacy — up to 105 lm/W — CRI >90

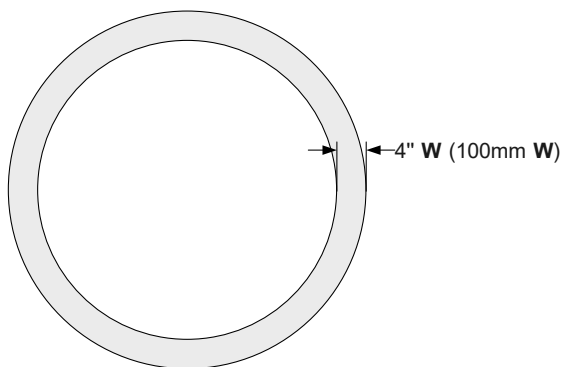

BOTTOM VIEW

* Not to scale.

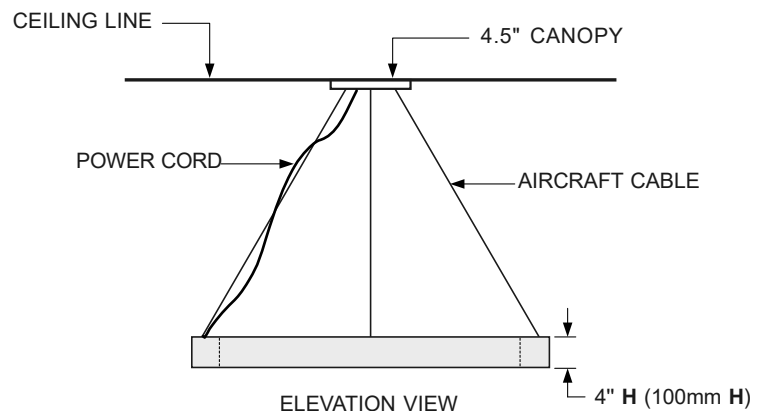

ELEVATION VIEW

APPROVED BY: _____ SIGNATURE: _____ DATE: _____



Construction

- PMMA acrylic diffuser with heavy-duty steel frame
- Square orbit profile, ten standard sizes (D24in–D189in)
- Standard finish: white | black | space grey | consult factory for custom finishes
- Uniform 4in (100mm) profile depth across all sizes

LED Driver

- Osram LED light source
- ARCATA driver, UL Listed, Class P
- Universal 120-277V input voltage
- 0-10V dimmable driver, Available option

Light Engine

- Available in 3000K, 3500K, 4000K
- Nominal efficacy: up to 105 lm/W
- CRI: greater than 90

Compliance

- UL Listed
- Driver is UL/Class P certified

Environment

- Suited for dry and damp locations
- Indoor architectural and commercial applications

Warranty

- Five (5) year limited warranty

Mounting

- Central canopy, suspended with 5ft (1.5m) aircraft cables and power cable
- Surface Mounting