Lumithree

LM-1139 Lighted Mirror
Product Specifications


ORDERING CODE

LM-1139-LED – ____ – ____ – ____ – ____ – ____

1 - Product ID	2 - Dimensions	3 - Voltage	4 - CCT	5 - Driver	6 - Installation
LM-1139-LED	**24 -** 24in x 36in **30 -** 30in x 48in **36 -** 36in x 60in **C -** Custom	**120 -** 120V **277 -** 277V **UNV -** Universal	**27 -** 2700K **30 -** 3000K **35 -** 3500K **40 -** 4000K **60 -** 6000K	**10DM -** 0-10V Dim. 10% **1DM -** 0-10V Dim. 1% **TRDM -** Triac Dimming **DLDM -** Dali Dimming **ST -** Standard Non-Dim.	**RM -** Recessed[1,2] **SM -** Surface [1] Not available W/ Keyhole Mounting [2] Not available W/ Indirect Light

7 - Mounting	8 - Options			
CM - Cleats Mounting[3] [3] Frame white powder coated **KM -** Keyhole Mounting[4] [4] Frame satin aluminum	**DF -** Defogger **TS -** Touch sensor **MS -** Motion sensor **BT -** Bluetooth audio[5]	**M3 -** Magnifying mirror x3 **M5 -** Magnifying mirror x5 **LD -** LED Digital clock **USB -** USB ports[5]	**TNL -** Top night light **BNL -** Bottom night light **PP -** Power plug[6]	**ID -** Indirect Light [5] Mirror depth to be 3in D [6] Standard is hardwired

CM





KM



LIGHTING SPECIFICATIONS

Dimensions	Direct Wattage & Lumen Output	Indirect Wattage & Lumen Output	CRI
24in W x 36in H x 2in D	30 Watt - 3,268 Total Lumen Output	16 Watt - 1,717 Total Lumen Output	90 + CRI
30in W x 48in H x 2in D	41 Watt - 4,458 Total Lumen Output	21 Watt - 2,319 Total Lumen Output	90 + CRI
36in W x 60in H x 2in D	53 Watt - 5,647 Total Lumen Output	27 Watt - 2,921 Total Lumen Output	90 + CRI

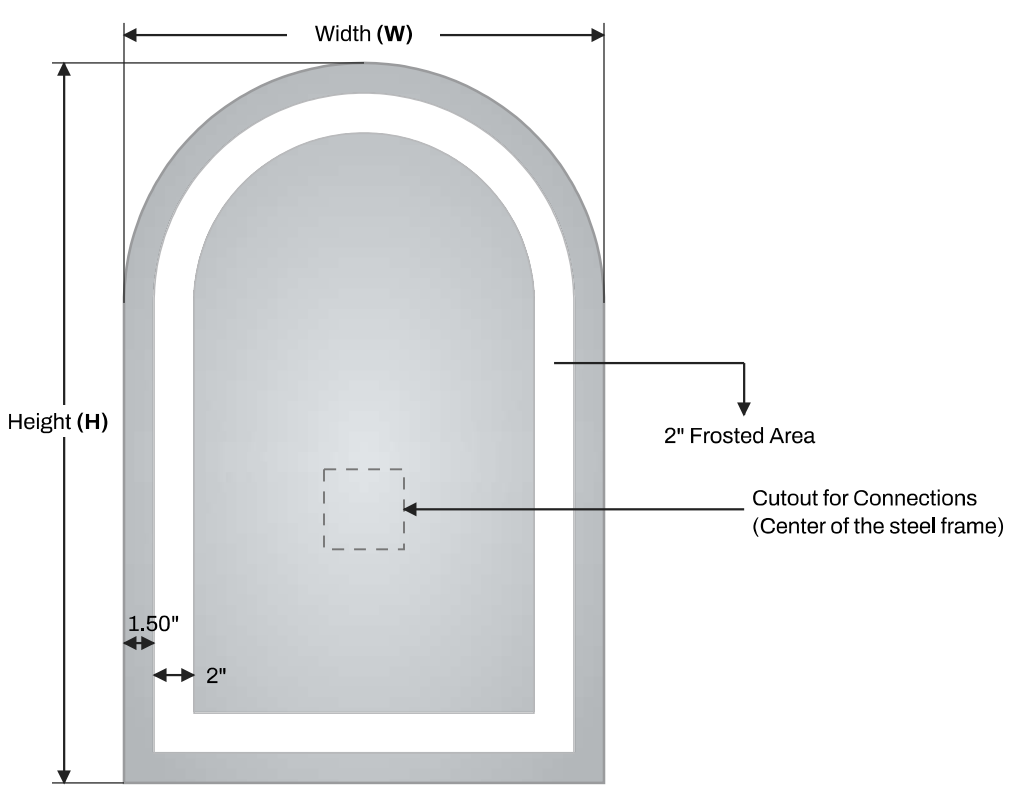

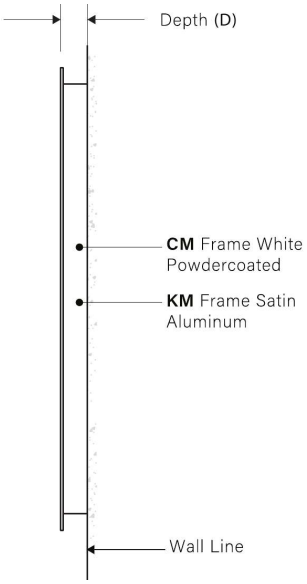

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions. Lighting values are calculated estimates.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____

LUMITHREE | WWW.LUMITHREE.COM | 1.800.455.5316 | 514.334.2045 | f. 514.334.1355

Lumithree Inc. reserves the right to change or modify product specifications without notice.

ADA COMPLIANT

c UL us LISTED